


Geothermal Memory Gauge

1.6875" RTD - Pressure - CCL

Features

- 8 hrs at 300 °C | 600 °F
- External Fast Response Temperature Probe
- Casing Collar Locator
- 0.1 s Fast Sample Rate Option
- Pressure Trigger Option
- 1 Million Sample Capacity
- Inconel 718 - NACE MR0175

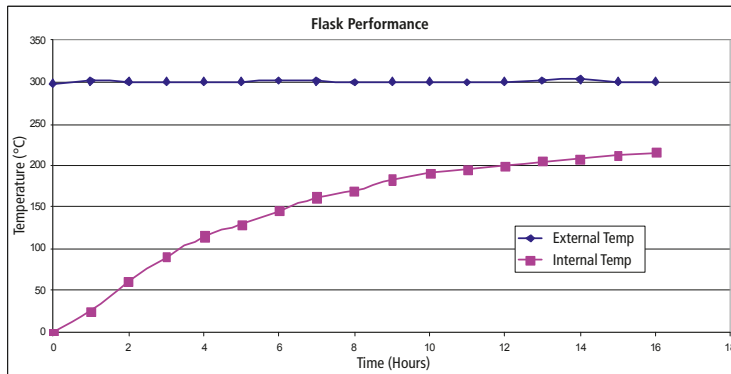

1.6875" OD Geothermal Gauge - Inconel 718		
Pressure	Part No.	
50 bar 750 psi	2710.01.00502	
100 bar 1,500 psi	2710.01.00503	
200 bar 3,000 psi	2710.01.00504	
400 bar 6,000 psi	2710.01.00505	
690 bar 10,000 psi	2710.01.00506	
1,000 bar 15,000 psi	2710.01.00507	
1,350 bar 20,000 psi	2710.01.00508	

Accessory Type	Part No.
Bullnose SS316	2710.01.00511
Casing Collar Locator	2710.01.01675
Pelican Case Assembly	2710.01.00526
Redress Kit Viton 90	2710.01.01672
Redress Kit Aflas 7182B	2710.01.01673
Redress Kit Chemraz 510	2710.01.01674

Specifications		
	Pressure	Temperature
Accuracy up to	0.022% F.S.	0.25 °C
Resolution	0.0003% F.S.	0.005 °C
Drift	< 3 psi / year	< 0.1 °C / year
Capacity	1 Million Samples	
Communication Method	USB	

